

Roto NT

Tilt&Turn hardware K / A

Basic security




Hinge side K, systems 12/18(20)-9 and 12/20(21, 22)-13

Hinge side A, systems 12/18(20)-9 and 12/20-13

12 mm clearance

18/20/21/22 mm overlap width

9/13 mm hardware axis

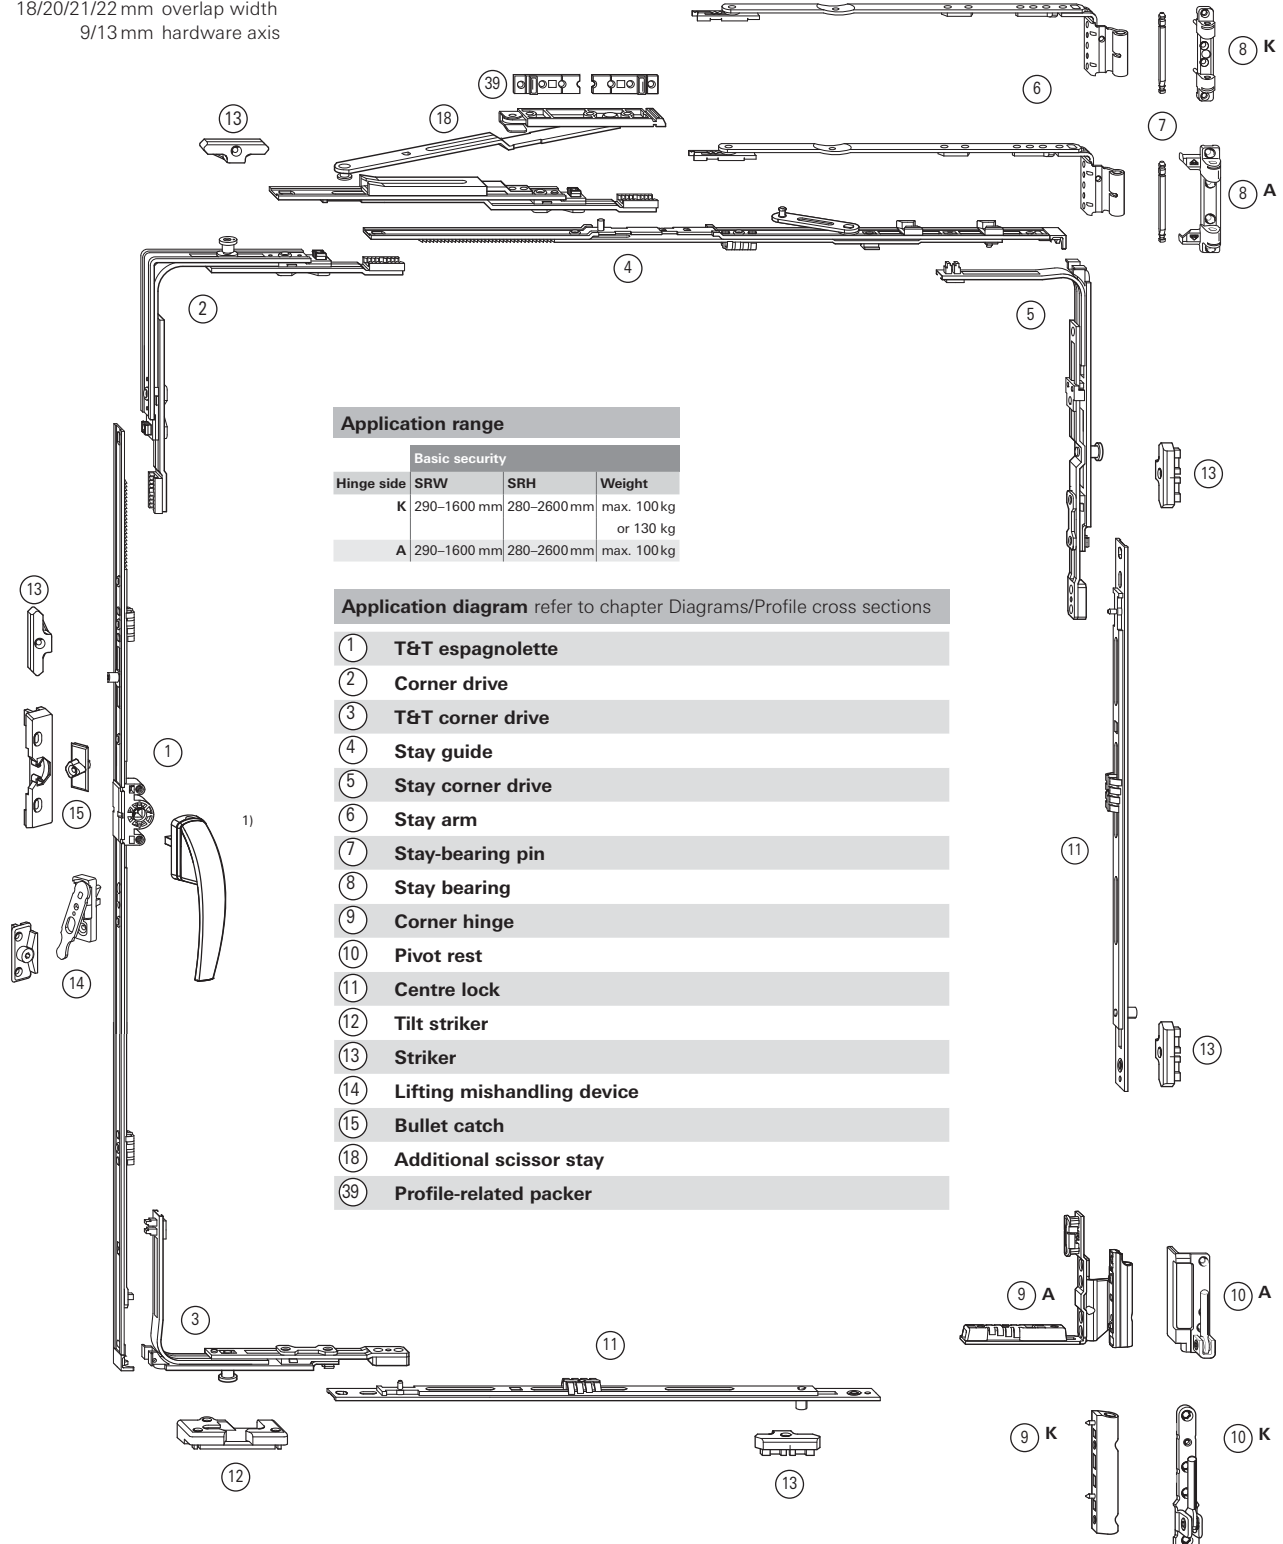

Application range

Basic security			
Hinge side	SRW	SRH	Weight
K	290-1600 mm	280-2600 mm	max. 100 kg or 130 kg
A	290-1600 mm	280-2600 mm	max. 100 kg

Application diagram refer to chapter Diagrams/Profile cross sections

- ① T&T espagnolette
- ② Corner drive
- ③ T&T corner drive
- ④ Stay guide
- ⑤ Stay corner drive
- ⑥ Stay arm
- ⑦ Stay-bearing pin
- ⑧ Stay bearing
- ⑨ Corner hinge
- ⑩ Pivot rest
- ⑪ Centre lock
- ⑫ Tilt striker
- ⑬ Striker
- ⑭ Lifting mishandling device
- ⑮ Bullet catch
- ⑰ Additional scissor stay
- ⑱ Profile-related packer

1) Refer to Roto catalogue BK 5 EN for handles