


### Striker dimensions (mm)

#### Fixed handle-height T&T espagnolette

#### Basic security

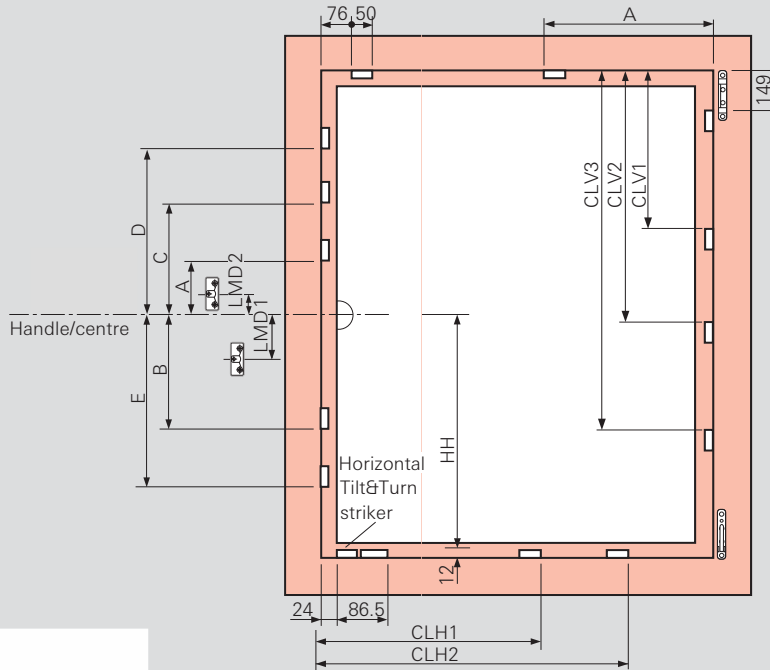

SRW =

SRH =

LMD = Lifting Mishandling Device

#### Centred/variable handle-height T&T espagnolette, BS15

SRH/mm	A	B	C	D	E	LMD1	LMD2
450- 620	-	-	-	-	-	-	-
621- 800	125	-	-	-	-	137	-
801- 1200	125	-	-	-	-	137	-
1201- 1600	125	340	-	-	-	137	-
1601- 2000	-	312	358	-	-	-	109
2001- 2400	-	312	358	758	740	-	109

#### CL (centre lock) vertical

SRH/mm	CLV1	CLV2	CLV3	
801- 1200	550	-	-	CL 400 E
1201- 1400	746	-	-	CL 600 E
1401- 1800	746	1150	-	CL 600 E CON + 400 E
1801- 2000	746	1346	-	CL 600 E CON + 600 E
2001- 2400	746	1346	1750	CL 600 E CON + 600 E CON + 400 E

#### CL horizontal

SRW/mm	CLH1	CLV2	
801 1200	462	-	CL 400 E
1201 1400	658	-	CL 600 E
1401 1600	658	1062	CL 600 E CON + 400 E

#### Stay guide

SRW/mm	A	Size
801- 1000	600	500 / 890
1001- 1200	750	500 / 1090
1201- 1400	750	500 / 1290
1401- 1600	750	500 / 1290 <sup>(1)</sup>

<sup>(1)</sup> With additional scissor-stay

# Roto NT

## Tilt&Turn hardware

### Basic security




Hinge side K, systems 12/18(20)-9 and 12/20(21, 22)-13

Hinge side A, systems 12/18(20)-9 and 12/20-13

12 mm clearance

18/20/21/22 mm overlap width

9/13 mm hardware axis

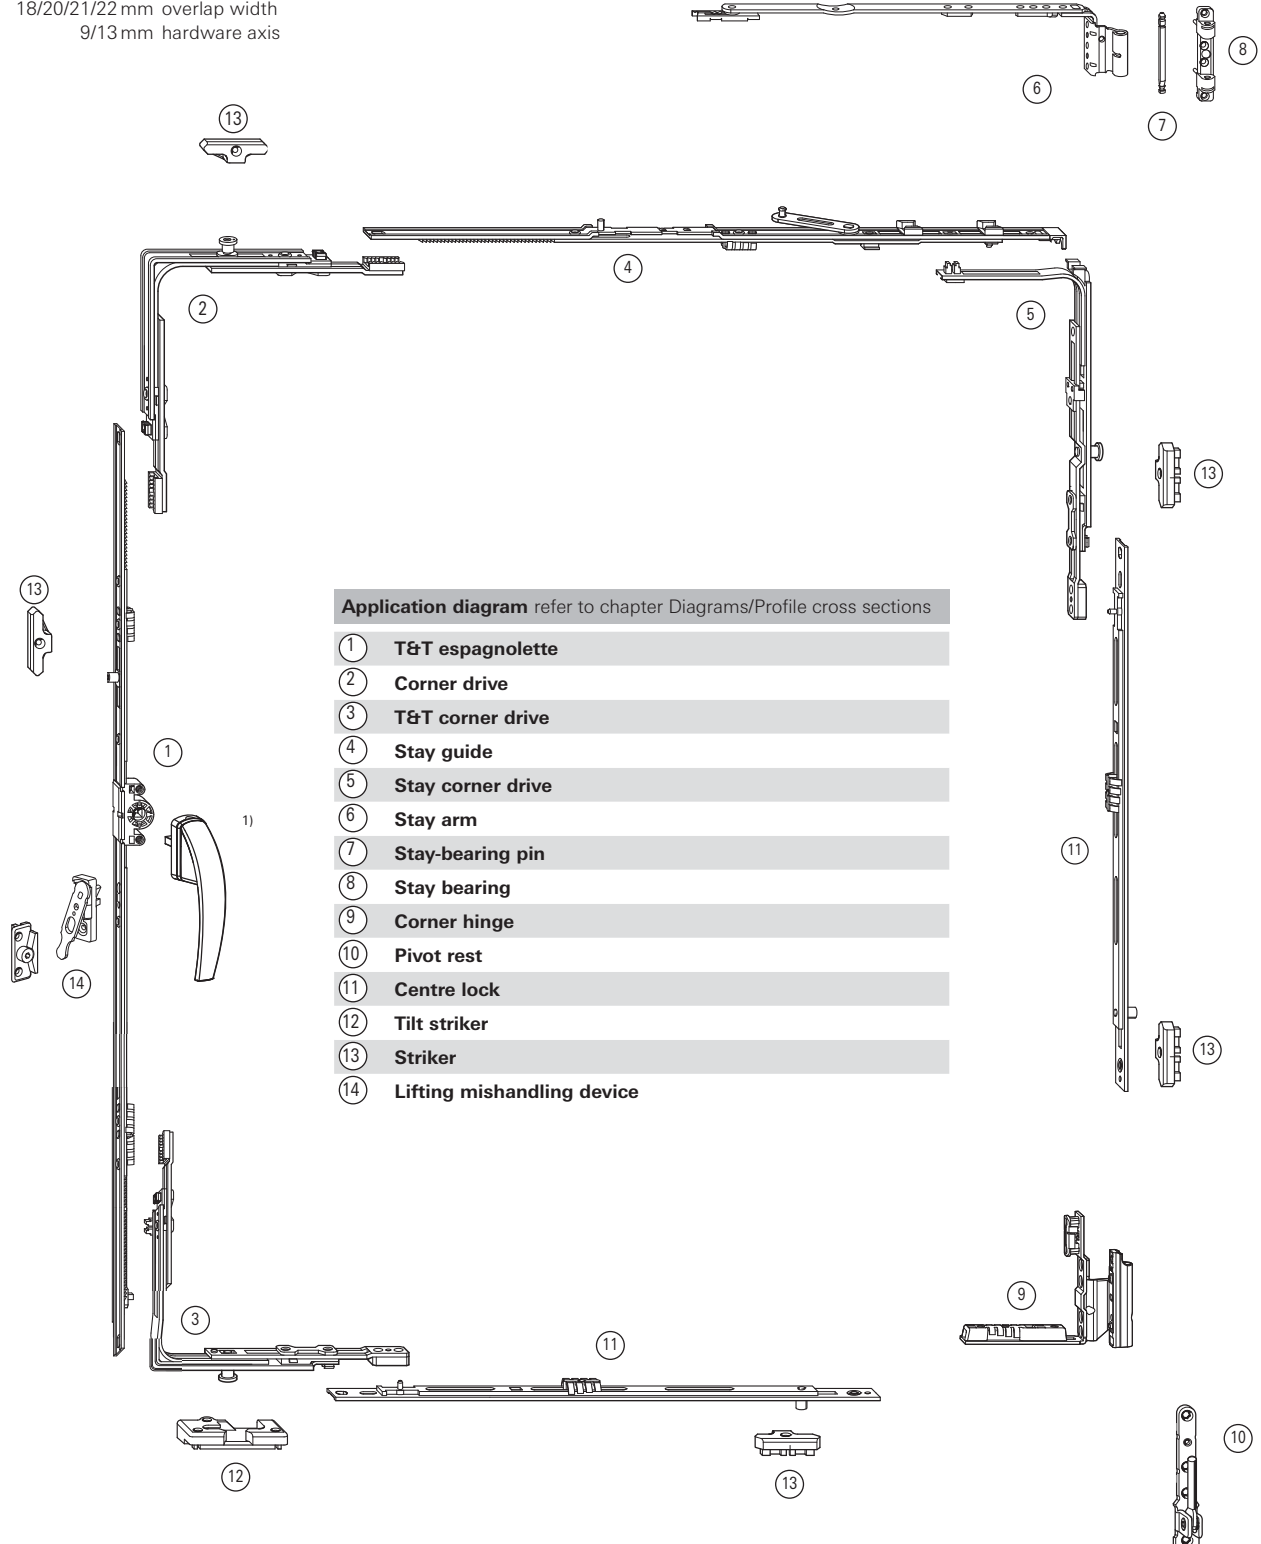

1) Refer to Roto catalogue BK 5 EN for handles